

OUTDOOR GARDEN LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	0.5W±10% Max

Number of LEDs

1 LEDs SMD

Luminous Flux

20LM (3000K)

Main Material

Aluminum & Metal & PMMA

Color Temperature

3000K / 4000K / 6500K

CRI ≥90

Power Factor ≥0.3


Working Temperature -10°C~45°C

Beam Angle (Optional) 36°

Fixture Dimmable Non-dimmable

Electrical Internal Driver

Protection class IP65



Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.		
Packaging Detail	62×41×26cm	
	STD PKG	10pcs
	N.W	9.58kgs
	G.W	11.58kgs

0.5W LED 3000K 20lm / incl.
DC24-40VDC / PRI: 90-265V~ 50/60 Hz

Driver SEC: Constant Current: DC900mA



Warm White 3000K ∠ 36°

1m	18.06lx	48.39cm
2m	4.51lx	96.77cm
3m	2.01lx	145.16cm
4m	1.13lx	193.54cm
5m	0.72lx	241.93cm

cd Height illuminance Diameter

Option colors



Various Brand of SMD LED Light Source:



OUTDOOR GARDEN LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	0.5W±10% Max

Number of LEDs

1 LEDs SMD

Luminous Flux

20LM (3000K)

Main Material

Aluminum & Metal & PMMA

Color Temperature

3000K / 4000K / 6500K

CRI ≥90

Power Factor ≥0.3


Working Temperature -10°C~45°C

Beam Angle (Optional) 36°

Fixture Dimmable Non-dimmable

Electrical Internal Driver

Protection class IP65

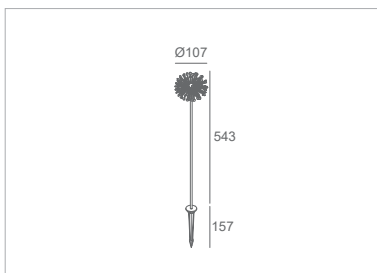

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.		
Packaging Detail	62×61×26cm	
	STD PKG	10pcs
	N.W	9.58kgs
	G.W	11.58kgs

0.5W LED 3000K 20lm / incl.
DC24-40VDC / PRI: 90-265V~ 50/60 Hz

Driver SEC: Constant Current: DC900mA



Warm White 3000K ∠ 36°

1m	18.06lx	48.39cm
2m	4.51lx	96.77cm
3m	2.01lx	145.16cm
4m	1.13lx	193.54cm
5m	0.72lx	241.93cm

cd Height illuminance Diameter

Option colors



Various Brand of SMD LED Light Source:



OUTDOOR GARDEN LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	0.5W±10% Max

Number of LEDs

1 LEDs SMD

Luminous Flux

20LM (3000K)

Main Material

Aluminum & Metal & PMMA

Color Temperature

3000K / 4000K / 6500K

CRI ≥90

Power Factor ≥0.3


Working Temperature -10°C~45°C

Beam Angle (Optional) 36°

Fixture Dimmable Non-dimmable


Electrical Internal Driver

Protection class IP65

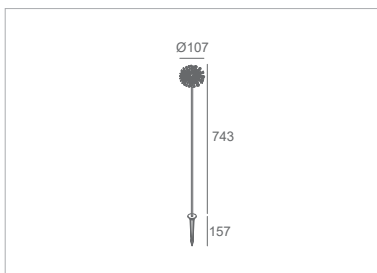

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.		
Packaging Detail	81×82×26cm	
	STD PKG	10pcs
	N.W	9.58kgs
	G.W	11.58kgs

0.5W LED 3000K 20lm / incl.
DC24-40VDC / PRI: 90-265V~ 50/60 Hz

Driver SEC: Constant Current: DC900mA



Warm White 3000K ∠ 36°

1m	18.06lx	48.39cm
2m	4.51lx	96.77cm
3m	2.01lx	145.16cm
4m	1.13lx	193.54cm
5m	0.72lx	241.93cm

cd Height illuminance Diameter

Option colors



Various Brand of SMD LED Light Source:



OUTDOOR GARDEN LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	0.5W±10% Max

Number of LEDs

1 LEDs SMD

Luminous Flux

20LM (3000K)

Main Material

Aluminum & Metal & PMMA

Color Temperature

3000K / 4000K / 6500K

CRI ≥90

Power Factor ≥0.3


Working Temperature -10°C~45°C

Beam Angle (Optional) 36°

Fixture Dimmable Non-dimmable

Electrical Internal Driver

Protection class IP65

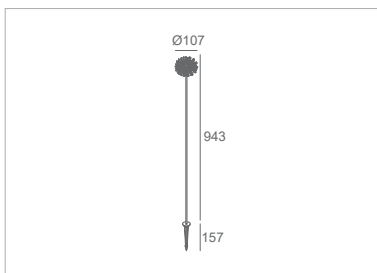

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.		
Packaging Detail	81×102×26cm	
	STD PKG	10pcs
	N.W	9.58kgs
	G.W	11.58kgs

0.5W LED 3000K 20lm / incl.
DC24-40VDC / PRI: 90-265V~ 50/60 Hz

Driver SEC: Constant Current: DC900mA



Warm White 3000K ∠ 36°

1m	18.06lx	48.39cm
2m	4.51lx	96.77cm
3m	2.01lx	145.16cm
4m	1.13lx	193.54cm
5m	0.72lx	241.93cm

cd Height illuminance Diameter

Option colors




Various Brand of SMD LED Light Source:



Recommended hot selling combinations▼

combination①

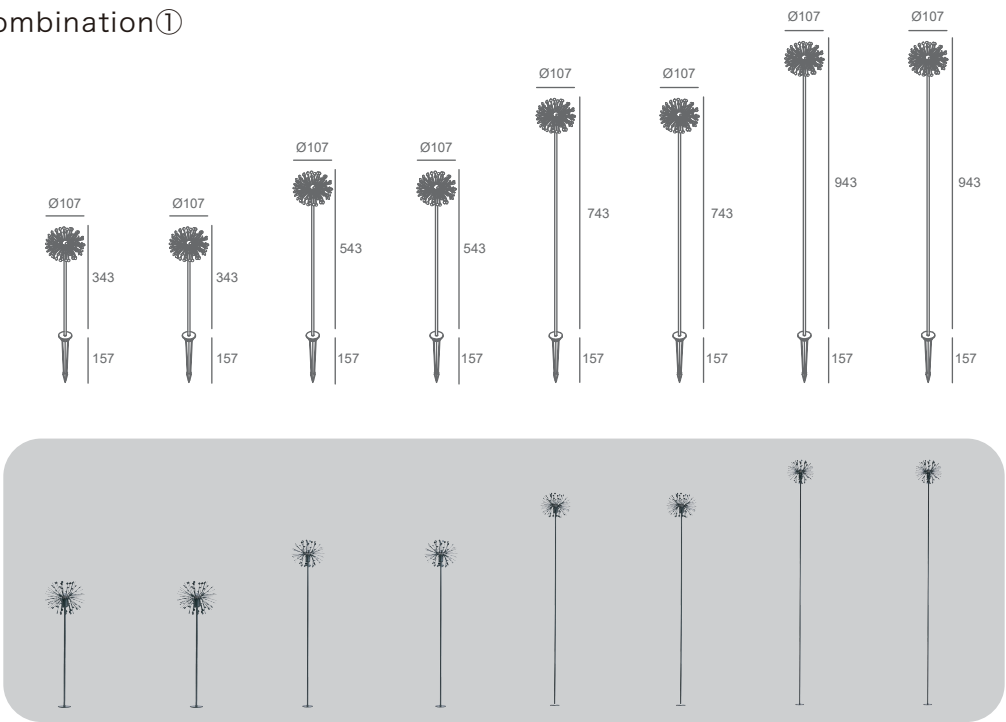

combination②

