

OUTDOOR GARDEN
LAMP

TECHNICAL SPECIFICATIONS	
Input (Optional)	110-265V~50/60 Hz
Maximum Wattage	1.5W±10% Max


Number of LEDs
6 LEDs SMD

Luminous Flux
46LM (3000K)

Main Material
Aluminum

Color Temperature
3000K / 4000K / 6500K

CRI	≥80
Power Factor	≥0.3
Working Temperature	-10°C~45°C
Beam Angle (Optional)	110°
Fixture Dimmable	Non-dimmable
Electrical	External Driver
Protection class	IP65

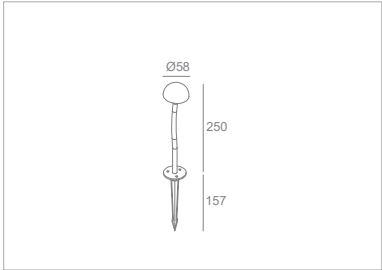

Especially designed for:
Outdoor patio lighting, great for landscape, swimming pool, garden, square, illuminating pathways, flower beds, trees, fences, driveways, stone walls, doorways, and etc.



CE	RoHS	UL	CCC	UL	UL	UL	UL	UL	UL
Product Model No.									
Packaging Detail		62×44×18.5cm							
		STD PKG	8pcs						
		N.W	2.3kgs						
		G.W	3.18kgs						

1.5W LED 3000K 46lm / incl. Driver SEC: Constant Current: DC1000mA
DC24VDC / PRI: 110-265 V~ 50/60 Hz 0.5A



Warm White 3000K ∠110°

	1m	24.93lx	157.10cm
	2m	6.23lx	314.20cm
	3m	2.77lx	471.31cm
	4m	1.56lx	628.41cm
	5m	1.00lx	785.51cm
	cd	Height	illuminance Diameter

Option colors



Various Brand of SMD LED Light Source:



OUTDOOR GARDEN LAMP

TECHNICAL SPECIFICATIONS

Input (Optional)	110-265V~50/60 Hz
Maximum Wattage	1.5W±10% Max

Number of LEDs

6 LEDs SMD

Luminous Flux

46LM (3000K)


Main Material

Aluminum

Color Temperature

3000K / 4000K / 6500K

CRI	≥80
Power Factor	≥0.3
Working Temperature	-10°C~45°C
Beam Angle (Optional)	110°
Fixture Dimmable	Non-dimmable
Electrical	External Driver
Protection class	IP65

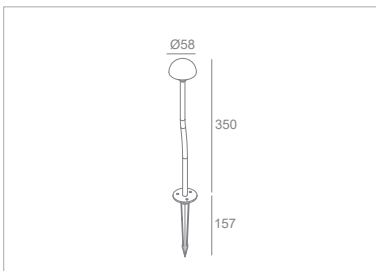

Especially designed for:

Outdoor patio lighting, great for landscape, swimming pool, garden, square, illuminating pathways, flower beds, trees, fences, driveways, stone walls, doorways, and etc.



Product Model No.		
Packaging Detail	62×44×18.5cm	
	STD PKG	8pcs
	N.W	2.3kgs
	G.W	3.18kgs

1.5W LED 3000K 46lm / incl.

Driver SEC: Constant Current: DC1000mA

DC24VDC / PRI: 110-265 V~ 50/60 Hz 0.5A



Warm White 3000K ∠110°

	1m	24.93lx	157.10cm
	2m	6.23lx	314.20cm
	3m	2.77lx	471.31cm
	4m	1.56lx	628.41cm
	5m	1.00lx	785.51cm
cd	Height	illuminance	Diameter

Option colors



Various Brand of SMD LED Light Source:



OUTDOOR GARDEN
LAMP

TECHNICAL SPECIFICATIONS	
Input (Optional)	110-265V~50/60 Hz
Maximum Wattage	1.5W±10% Max


Number of LEDs
6 LEDs SMD

Luminous Flux
45LM (3000K)

Main Material
Aluminum

Color Temperature
3000K / 4000K / 6500K

CRI	≥80
Power Factor	≥0.3
Working Temperature	-10°C~45°C
Beam Angle (Optional)	110°
Fixture Dimmable	Non-dimmable
Electrical	External Driver
Protection class	IP65

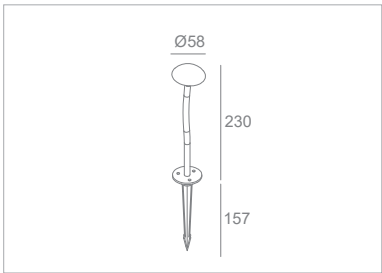

Especially designed for:

Outdoor patio lighting, great for landscape, swimming pool, garden, square, illuminating pathways, flower beds, trees, fences, driveways, stone walls, doorways, and etc.



Product Model No.		
Packaging Detail	62×44×18.5cm	
	STD PKG	8pcs
	N.W	2.3kgs
	G.W	3.18kgs


1.5W LED 3000K 45lm / incl.

Driver SEC: Constant Current: DC1000mA

DC24VDC / PRI: 110-265 V~ 50/60 Hz 0.5A



Warm White 3000K ∠110°

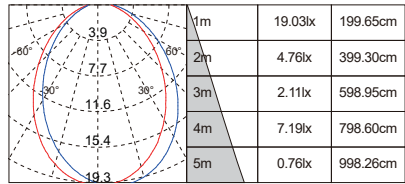

cd Height illuminance Diameter

Option colors



Various Brand of SMD LED Light Source:



OUTDOOR GARDEN LAMP

TECHNICAL SPECIFICATIONS

Input (Optional)	110-265V~50/60 Hz
Maximum Wattage	1.5W±10% Max

Number of LEDs

6 LEDs SMD

Luminous Flux

45LM (3000K)


Main Material

Aluminum

Color Temperature

3000K / 4000K / 6500K

CRI	≥80
Power Factor	≥0.3
Working Temperature	-10°C~45°C
Beam Angle (Optional)	110°
Fixture Dimmable	Non-dimmable
Electrical	External Driver
Protection class	IP65

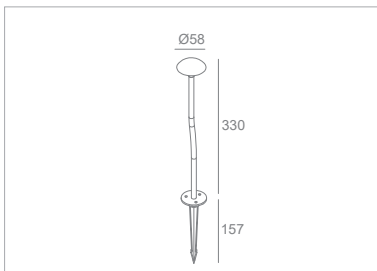

Especially designed for:

Outdoor patio lighting, great for landscape, swimming pool, garden, square, illuminating pathways, flower beds, trees, fences, driveways, stone walls, doorways, and etc.



Product Model No.		
Packaging Detail	62×44×18.5cm	
	STD PKG	8pcs
	N.W	2.3kgs
	G.W	3.18kgs

1.5W LED 3000K 45lm / incl.

Driver SEC: Constant Current: DC1000mA

DC24VDC / PRI: 110-265 V~ 50/60 Hz 0.5A



Warm White 3000K ∠110°

	1m	19.03lx	199.65cm
	2m	4.76lx	399.30cm
	3m	2.11lx	598.95cm
	4m	1.19lx	798.60cm
	5m	0.76lx	998.26cm
cd	Height	illuminance	Diameter

Option colors



Various Brand of SMD LED Light Source:



OUTDOOR GARDEN
LAMP


TECHNICAL SPECIFICATIONS	
Input (Optional)	110-265V~50/60 Hz
Maximum Wattage	4W±10% Max
Number of LEDs	
24 LEDs SMD	

Luminous Flux
208LM (3000K)

Main Material
Aluminum

Color Temperature
3000K / 4000K / 6500K

CRI	≥80
Power Factor	≥0.5
Working Temperature	-10°C~45°C
Beam Angle (Optional)	110°
Fixture Dimmable	Non-dimmable
Electrical	External Driver
Protection class	IP65

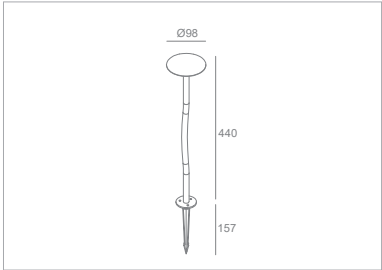


Especially designed for:
Outdoor patio lighting, great for landscape, swimming pool, garden, square, illuminating pathways, flower beds, trees, fences, driveways, stone walls, doorways, and etc.



CE	RoHS	UL	CCC	ETL	UL	UL	UL	UL	UL	UL
Product Model No.										
Packaging Detail		62×44×18.5cm								
		STD PKG	8pcs							
		N.W	2.3kgs							
		G.W	3.18kgs							

4W LED 3000K 208lm / incl. Driver SEC: Constant Current: DC1000mA
DC24VDC / PRI: 110-265 V~ 50/60 Hz 0.5A



Warm White 3000K ∠110°

	1m	86.64lx	208.92cm
	2m	21.66lx	417.85cm
	3m	9.63lx	626.77cm
	4m	5.42lx	835.69cm
	5m	3.47lx	1044.61cm
cd	Height	illuminance	Diameter

Option colors



Various Brand of SMD LED Light Source:

OSRAM	PHILIPS	LUMENS	EPISTAR	CITIZEN	LUMINUS	DISON	SAMSUNG	BRIDGELUX	LG
-------	---------	--------	---------	---------	---------	-------	---------	-----------	----

OUTDOOR GARDEN LAMP

TECHNICAL SPECIFICATIONS

Input (Optional)	110-265V~50/60 Hz
Maximum Wattage	4W±10% Max


Number of LEDs
24 LEDs SMD

Luminous Flux
208LM (3000K)

Main Material
Aluminum

Color Temperature
3000K / 4000K / 6500K

CRI	≥80
Power Factor	≥0.5
Working Temperature	-10°C~45°C
Beam Angle (Optional)	110°
Fixture Dimmable	Non-dimmable
Electrical	External Driver
Protection class	IP65

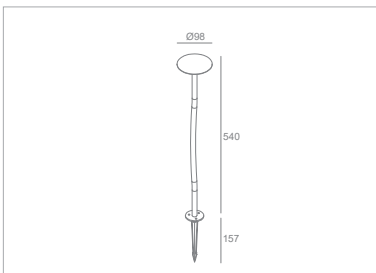

Especially designed for:

Outdoor patio lighting, great for landscape, swimming pool, garden, square, illuminating pathways, flower beds, trees, fences, driveways, stone walls, doorways, and etc.



Product Model No.		
Packaging Detail	62×44×18.5cm	
	STD PKG	8pcs
	N.W	2.3kgs
	G.W	3.18kgs

4W LED 3000K 208lm / incl. Driver SEC: Constant Current: DC1000mA
DC24VDC / PRI: 110-265 V~ 50/60 Hz 0.5A



Warm White 3000K ∠110°

	1m	86.64lx	208.92cm
	2m	21.66lx	417.85cm
	3m	9.63lx	626.77cm
	4m	5.42lx	835.69cm
	5m	3.47lx	1044.61cm
cd	Height	illuminance	Diameter

Option colors



Various Brand of SMD LED Light Source:



OUTDOOR GARDEN
LAMP

TECHNICAL SPECIFICATIONS	
Input (Optional)	110-265V~50/60 Hz
Maximum Wattage	6W±10% Max


Number of LEDs	
24 LEDs SMD	

Luminous Flux	
349LM (3000K)	

Main Material	
Aluminum	

Color Temperature	
3000K / 4000K / 6500K	

CRI	≥80
Power Factor	≥0.5
Working Temperature	-10°C~45°C
Beam Angle (Optional)	110°
Fixture Dimmable	Non-dimmable
Electrical	External Driver
Protection class	IP65

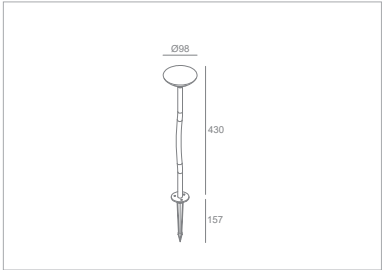


Especially designed for:
Outdoor patio lighting, great for landscape, swimming pool, garden, square, illuminating pathways, flower beds, trees, fences, driveways, stone walls, doorways, and etc.



CE	RoHS	REACH	UL	CCC	ETL	UL	UL	UL	UL
Product Model No.									
Packaging Detail		62×44×18.5cm							
		STD PKG	8pcs						
		N.W	2.3kgs						
		G.W	3.18kgs						

6W LED 3000K 349lm / incl. Driver SEC: Constant Current: DC1000mA
DC24VDC / PRI: 110-265 V~ 50/60 Hz 0.5A



Warm White 3000K ∠110°

	1m	144.75lx	222.12cm
	2m	36.19lx	444.24cm
	3m	16.08lx	666.37cm
	4m	9.05lx	888.49cm
	5m	5.79lx	7110.61cm
	cd	Height	illuminance Diameter

Option colors



Various Brand of SMD LED Light Source:

OSRAM	PHILIPS	LUMENS	EPISTAR	CITIZEN	LUMINUS	DISON	SAMSUNG	BRIDGELUX	LG
-------	---------	--------	---------	---------	---------	-------	---------	-----------	----

OUTDOOR GARDEN LAMP

TECHNICAL SPECIFICATIONS

Input (Optional)	110-265V~50/60 Hz
Maximum Wattage	6W±10% Max


Number of LEDs
24 LEDs SMD

Luminous Flux
349LM (3000K)

Main Material
Aluminum

Color Temperature
3000K / 4000K / 6500K

CRI	≥80
Power Factor	≥0.5
Working Temperature	-10°C~45°C
Beam Angle (Optional)	110°
Fixture Dimmable	Non-dimmable
Electrical	External Driver
Protection class	IP65

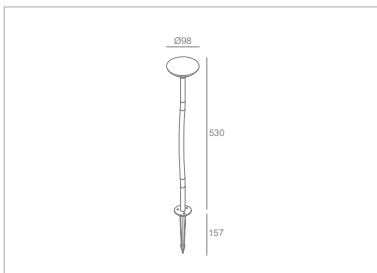

Especially designed for:

Outdoor patio lighting, great for landscape, swimming pool, garden, square, illuminating pathways, flower beds, trees, fences, driveways, stone walls, doorways, and etc.



Product Model No.		
Packaging Detail	62×44×18.5cm	
	STD PKG	8pcs
	N.W	2.3kgs
	G.W	3.18kgs

6W LED 3000K 349lm / incl.
DC24VDC / PRI: 110-265 V~ 50/60 Hz 0.5A

Driver SEC: Constant Current: DC1000mA



Warm White 3000K ∠110°

	1m	144.75lx	222.12cm
	2m	36.19lx	444.24cm
	3m	16.08lx	666.37cm
	4m	9.05lx	888.49cm
	5m	5.79lx	7110.61cm
cd	Height	illuminance	Diameter

Option colors




Various Brand of SMD LED Light Source:



Recommended hot selling combinations▼

combination①

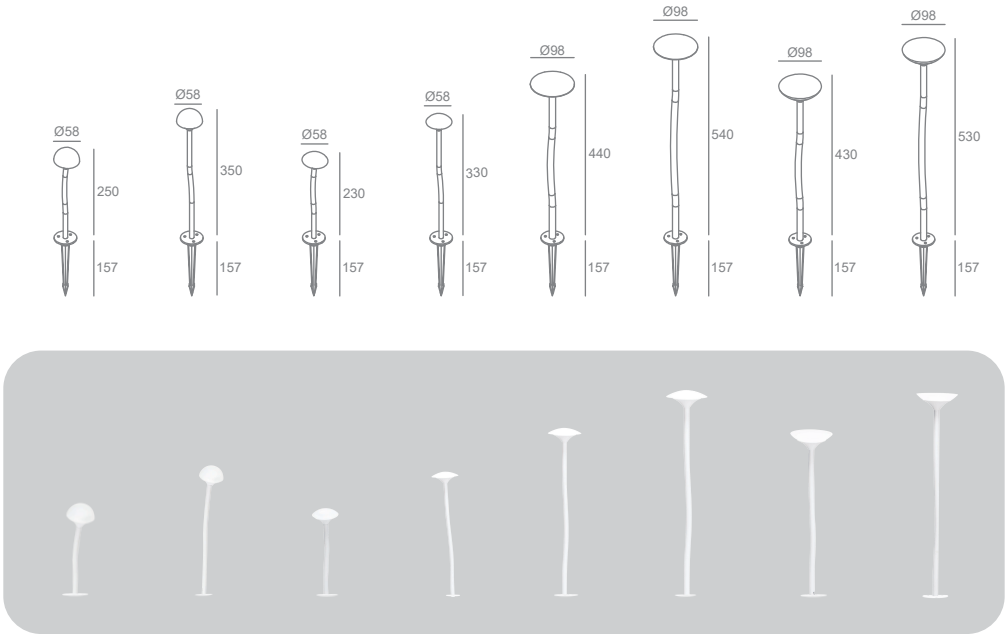

combination②

