

OUTDOOR GARDEN
LAMP

TECHNICAL SPECIFICATIONS	
Input (Optional)	90-265V~50/60 Hz
Maximum Wattage	6W±10% Max


Number of LEDs	
24 LEDs SMD	

Luminous Flux	
456LM (3000K)	


Main Material	
Aluminum	

Color Temperature	
3000K / 4000K / 6500K	

CRI	≥80
Power Factor	≥0.6
Working Temperature	-10°C~45°C
Beam Angle (Optional)	110°
Fixture Dimmable	Non-dimmable
Electrical	External Driver
Protection class	IP65

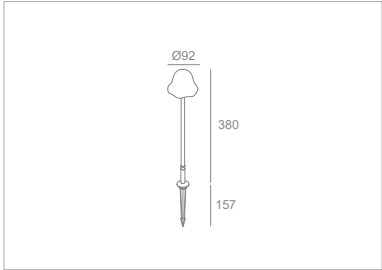


Especially designed for:
Outdoor patio lighting, great for landscape, swimming pool,garden, square, illuminating pathways, flower beds, trees, fences,driveways, stone walls, doorways, and etc.

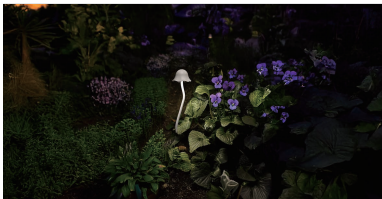

Product Model No.		
Packaging Detail	101.5×32×22cm	
	STD PKG	6pcs
	N.W	2.27kgs
	G.W	3.27kgs

6W LED 3000K 456lm / incl. Driver SEC: Constant Current: DC1000mA
DC24VDC / PRI: 90-265V~ 50/60 Hz 0.25A



	1m	203.23lx	224.87cm
	2m	50.81lx	449.74cm
	3m	22.58lx	674.61cm
	4m	12.70lx	899.48cm
	5m	8.13lx	1124.35cm
	cd	Height	illuminance

Option colors



Various Brand of SMD LED Light Source:

OSRAM	PHILIPS	LUMENS	EPISTAR	CITIZEN	LUMINUS	DISON	SAMSUNG	BRIDGELUX	LG
-------	---------	--------	---------	---------	---------	-------	---------	-----------	----

OUTDOOR GARDEN
LAMP


TECHNICAL SPECIFICATIONS	
Input (Optional)	90-265V~50/60 Hz
Maximum Wattage	6W±10% Max
Number of LEDs	
24 LEDs SMD	

Luminous Flux
456LM (3000K)

Main Material
Aluminum

Color Temperature
3000K / 4000K / 6500K

CRI	≥80
Power Factor	≥0.6
Working Temperature	-10°C~45°C
Beam Angle (Optional)	110°
Fixture Dimmable	Non-dimmable
Electrical	External Driver
Protection class	IP65

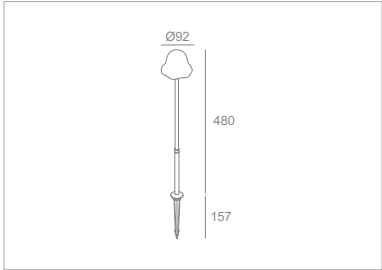

Especially designed for:
Outdoor patio lighting, great for landscape, swimming pool, garden, square, illuminating pathways, flower beds, trees, fences, driveways, stone walls, doorways, and etc.



CE	RoHS	UL	CCC	ETL	UL	UL	UL	UL	UL
Product Model No.									
Packaging Detail		101.5×32×22cm							
		STD PKG	6pcs						
		N.W	2.27kgs						
		G.W	3.27kgs						

6W LED 3000K 456lm / incl. Driver SEC: Constant Current: DC1000mA
DC24VDC / PRI: 90-265V~ 50/60 Hz 0.25A



Warm White 3000K ∠110°

	1m	203.23lx	224.87cm
	2m	50.81lx	449.74cm
	3m	22.58lx	674.61cm
	4m	12.70lx	899.48cm
	5m	8.13lx	1124.35cm
	cd	Height	illuminance Diameter

Option colors



Various Brand of SMD LED Light Source:

OSRAM	PHILIPS	LUMENS	EPISTAR	CITIZEN	LUMINUS	DISON	SAMSUNG	BRIDGELUX	LG
-------	---------	--------	---------	---------	---------	-------	---------	-----------	----

OUTDOOR GARDEN
LAMP

TECHNICAL SPECIFICATIONS	
Input (Optional)	90-265V~50/60 Hz
Maximum Wattage	6W±10% Max


Number of LEDs	
24 LEDs SMD	

Luminous Flux	
456LM (3000K)	

Main Material	
Aluminum	

Color Temperature	
3000K / 4000K / 6500K	

CRI	≥80
Power Factor	≥0.6
Working Temperature	-10°C~45°C
Beam Angle (Optional)	110°
Fixture Dimmable	Non-dimmable
Electrical	External Driver
Protection class	IP65

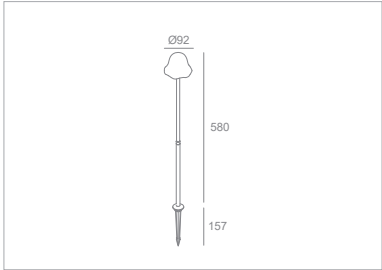

Especially designed for:
Outdoor patio lighting, great for landscape, swimming pool, garden, square, illuminating pathways, flower beds, trees, fences, driveways, stone walls, doorways, and etc.



CE	RoHS	REACH	UL	CCC	ETL	UL	UL	UL	UL
Product Model No.									
Packaging Detail		101.5×32×22cm							
		STD PKG	6pcs						
		N.W	2.27kgs						
		G.W	3.27kgs						

6W LED 3000K 456lm / incl. Driver SEC: Constant Current: DC1000mA
DC24VDC / PRI: 90-265V~ 50/60 Hz 0.25A



Light distribution diagram showing beam angle and illuminance values. The diagram includes a table with the following data: <table><tr><th>Height</th><th>1m</th><th>2m</th><th>3m</th><th>4m</th><th>5m</th></tr><tr><td>203.23lx</td><td>50.81lx</td><td>22.58lx</td><td>12.70lx</td><td>8.13lx</td></tr><tr><td>224.87cm</td><td>449.74cm</td><td>674.61cm</td><td>899.48cm</td><td>1124.35cm</td></tr></table>	Height	1m	2m	3m	4m	5m	203.23lx	50.81lx	22.58lx	12.70lx	8.13lx	224.87cm	449.74cm	674.61cm	899.48cm	1124.35cm	cd	Height	illuminance	Diameter
Height	1m	2m	3m	4m	5m															
203.23lx	50.81lx	22.58lx	12.70lx	8.13lx																
224.87cm	449.74cm	674.61cm	899.48cm	1124.35cm																

Option colors



Various Brand of SMD LED Light Source:

OSRAM	PHILIPS	LUMENS	EPISTAR	CITIZEN	LUMINUS	DISON	SAMSUNG	BRIDGELUX	LG
-------	---------	--------	---------	---------	---------	-------	---------	-----------	----

OUTDOOR GARDEN
LAMP

TECHNICAL SPECIFICATIONS	
Input (Optional)	90-265V~50/60 Hz
Maximum Wattage	6W±10% Max


Number of LEDs	
24 LEDs SMD	

Luminous Flux	
456LM (3000K)	

Main Material	
Aluminum	

Color Temperature	
3000K / 4000K / 6500K	

CRI	≥80
Power Factor	≥0.6
Working Temperature	-10°C~45°C
Beam Angle (Optional)	110°
Fixture Dimmable	Non-dimmable
Electrical	External Driver
Protection class	IP65

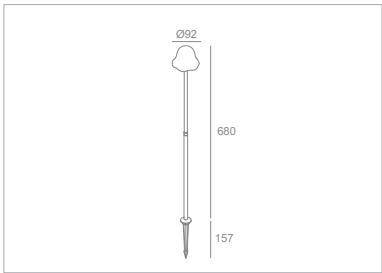

Especially designed for:
Outdoor patio lighting, great for landscape, swimming pool, garden, square, illuminating pathways, flower beds, trees, fences, driveways, stone walls, doorways, and etc.



CE	RoHS	REACH	UL	CCC	ETL	UL	UL	UL	UL
Product Model No.									
Packaging Detail		101.5×32×22cm							
		STD PKG	6pcs						
		N.W	2.27kgs						
		G.W	3.27kgs						

6W LED 3000K 456lm / incl. Driver SEC: Constant Current: DC1000mA
DC24VDC / PRI: 90-265V~ 50/60 Hz 0.25A



	1m	203.23lx	224.87cm
	2m	50.81lx	449.74cm
	3m	22.58lx	674.61cm
	4m	12.70lx	899.48cm
	5m	8.13lx	1124.35cm
	cd	Height	illuminance Diameter

Option colors



Various Brand of SMD LED Light Source:

OSRAM	PHILIPS	LUMENS	EPISTAR	CITIZEN	LUMINUS	DISON	SAMSUNG	BRIDGELUX	LG
-------	---------	--------	---------	---------	---------	-------	---------	-----------	----

OUTDOOR GARDEN
LAMP

TECHNICAL SPECIFICATIONS	
Input (Optional)	90-265V~50/60 Hz
Maximum Wattage	6W±10% Max


Number of LEDs	
24 LEDs SMD	

Luminous Flux	
456LM (3000K)	

Main Material	
Aluminum	

Color Temperature	
3000K / 4000K / 6500K	

CRI	≥80
Power Factor	≥0.6
Working Temperature	-10°C~45°C
Beam Angle (Optional)	110°
Fixture Dimmable	Non-dimmable
Electrical	External Driver
Protection class	IP65

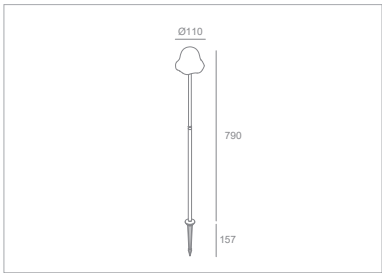

Especially designed for:
Outdoor patio lighting, great for landscape, swimming pool, garden, square, illuminating pathways, flower beds, trees, fences, driveways, stone walls, doorways, and etc.



CE	RoHS	UL	CCC	ETL	UL	UL	UL	UL	UL
Product Model No.									
Packaging Detail		101.5×32×22cm							
		STD PKG	6pcs						
		N.W	2.27kgs						
		G.W	3.27kgs						

6W LED 3000K 456lm / incl. Driver SEC: Constant Current: DC1000mA
DC24VDC / PRI: 90-265V~ 50/60 Hz 0.25A



	1m	203.23lx	224.87cm
	2m	50.81lx	449.74cm
	3m	22.58lx	674.61cm
	4m	12.70lx	899.48cm
	5m	8.13lx	1124.35cm
	cd	Height	illuminance Diameter

Option colors



Various Brand of SMD LED Light Source:

OSRAM	PHILIPS	LUMENS	EPISTAR	CITIZEN	LUMINUS	DISON	SAMSUNG	BRIDGELUX	LG
-------	---------	--------	---------	---------	---------	-------	---------	-----------	----

OUTDOOR GARDEN
LAMP

TECHNICAL SPECIFICATIONS	
Input (Optional)	90-265V~50/60 Hz
Maximum Wattage	6W±10% Max


Number of LEDs	
24 LEDs SMD	

Luminous Flux	
456LM (3000K)	

Main Material	
Aluminum	

Color Temperature	
3000K / 4000K / 6500K	

CRI	≥80
Power Factor	≥0.6
Working Temperature	-10°C~45°C
Beam Angle (Optional)	110°
Fixture Dimmable	Non-dimmable
Electrical	External Driver
Protection class	IP65

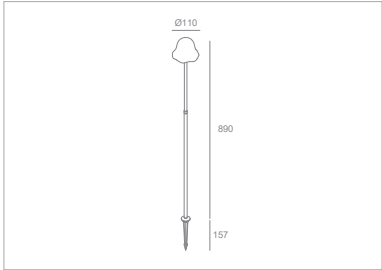


Especially designed for:
Outdoor patio lighting, great for landscape, swimming pool, garden, square, illuminating pathways, flower beds, trees, fences, driveways, stone walls, doorways, and etc.



Product Model No.		
Packaging Detail	101.5×32×22cm	
	STD PKG	6pcs
	N.W	2.27kgs
	G.W	3.27kgs

6W LED 3000K 456lm / incl. Driver SEC: Constant Current: DC1000mA
DC24VDC / PRI: 90-265V~ 50/60 Hz 0.25A



	1m	203.23lx	224.87cm
	2m	50.81lx	449.74cm
	3m	22.58lx	674.61cm
	4m	12.70lx	899.48cm
	5m	8.13lx	1124.35cm
	cd	Height	illuminance

Option colors





Various Brand of SMD LED Light Source:

OSRAM	PHILIPS	LUMENS	EPISTAR	CITIZEN	LUMINUS	DISON	SAMSUNG	BRIDGELUX	LG
-------	---------	--------	---------	---------	---------	-------	---------	-----------	----

Recommended hot selling combinations▼

combination①

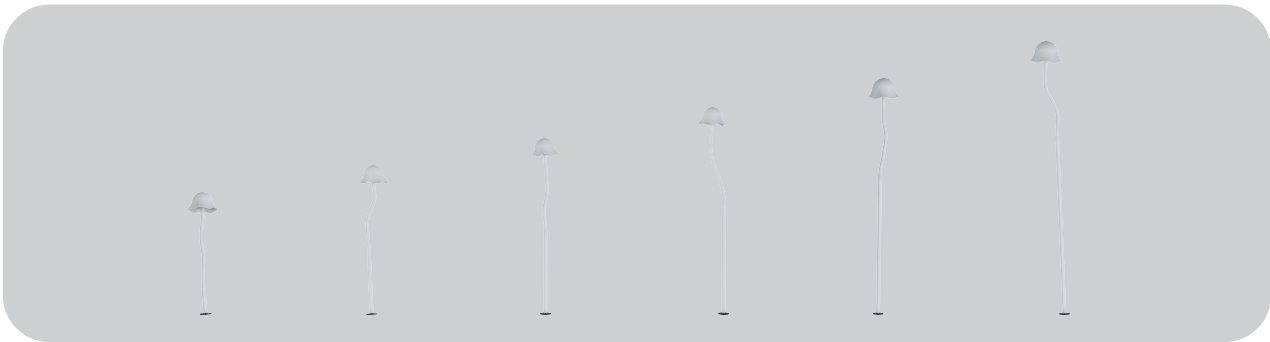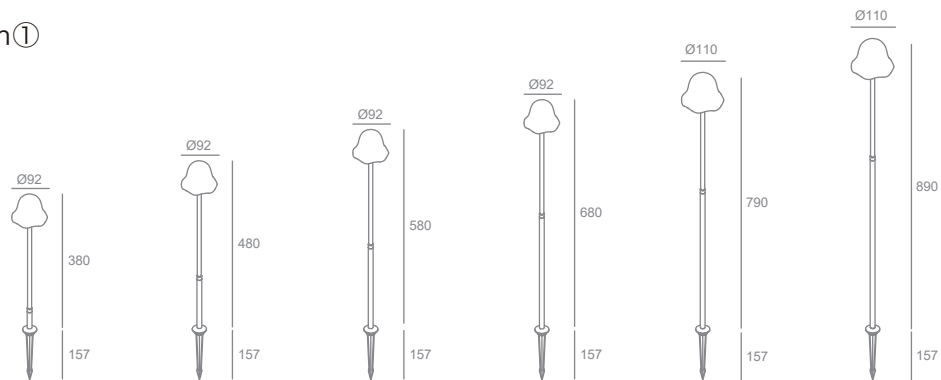

combination②

