

OUTDOOR GARDEN LAMP

TECHNICAL SPECIFICATIONS

Input (Optional)	90-265V~50/60 Hz
Maximum Wattage	5.5W±10% Max


Number of LEDs
24 LEDs SMD

Luminous Flux
273LM (3000K)

Main Material
Aluminum


Color Temperature
3000K / 4000K / 6500K

CRI	≥80
Power Factor	≥0.5
Working Temperature	-10°C~45°C
Beam Angle (Optional)	110°
Fixture Dimmable	Non-dimmable
Electrical	External Driver
Protection class	IP65

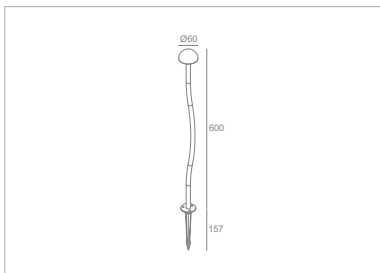

Especially designed for:

Outdoor patio lighting, great for landscape, swimming pool, garden, square, illuminating pathways, flower beds, trees, fences, driveways, stone walls, doorways, and etc.



Product Model No.		
Packaging Detail	126×17×14cm	
	STD PKG	4pcs
	N.W	1.57kgs
	G.W	2.57kgs

5.5W LED 3000K 273lm / incl.
DC24VDC / PRI: 90-265 V~ 50/60 Hz 0.5A

Driver SEC: Constant Current: DC1000mA



Warm White 3000K ∠110°

	1m	108.53lx	210.76cm
	2m	27.13lx	421.51cm
	3m	12.06lx	632.27cm
	4m	6.78lx	843.02cm
	5m	4.34lx	1053.78cm
cd	Height	illuminance	Diameter

Option colors



Various Brand of SMD LED Light Source:



OUTDOOR GARDEN LAMP

TECHNICAL SPECIFICATIONS

Input (Optional)	90-265V~50/60 Hz
Maximum Wattage	5.5W±10% Max


Number of LEDs
24 LEDs SMD

Luminous Flux
273LM (3000K)

Main Material
Aluminum


Color Temperature
3000K / 4000K / 6500K

CRI	≥80
Power Factor	≥0.5
Working Temperature	-10°C~45°C
Beam Angle (Optional)	110°
Fixture Dimmable	Non-dimmable
Electrical	External Driver
Protection class	IP65

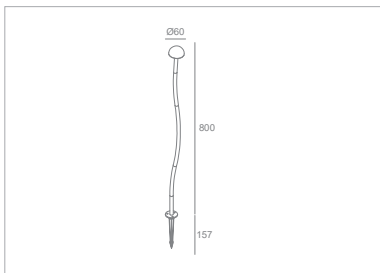

Especially designed for:

Outdoor patio lighting, great for landscape, swimming pool, garden, square, illuminating pathways, flower beds, trees, fences, driveways, stone walls, doorways, and etc.



Product Model No.		
Packaging Detail	126×17×14cm	
	STD PKG	4pcs
	N.W	1.57kgs
	G.W	2.57kgs

5.5W LED 3000K 273lm / incl.
DC24VDC / PRI: 90-265 V~ 50/60 Hz 0.5A

Driver SEC: Constant Current: DC1000mA



Warm White 3000K ∠110°

Height	illuminance	Diameter
1m	108.53lx	210.76cm
2m	27.13lx	421.51cm
3m	12.06lx	632.27cm
4m	6.78lx	843.02cm
5m	4.34lx	1053.78cm

cd

Option colors



Various Brand of SMD LED Light Source:



OUTDOOR GARDEN
LAMP

TECHNICAL SPECIFICATIONS	
Input (Optional)	90-265V~50/60 Hz
Maximum Wattage	5.5W±10% Max


Number of LEDs
24 LEDs SMD

Luminous Flux
273LM (3000K)


Main Material
Aluminum

Color Temperature
3000K / 4000K / 6500K

CRI	≥80
Power Factor	≥0.5
Working Temperature	-10°C~45°C
Beam Angle (Optional)	110°
Fixture Dimmable	Non-dimmable
Electrical	External Driver
Protection class	IP65

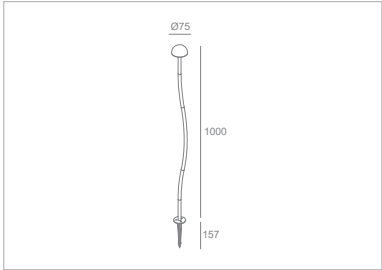

Especially designed for:
Outdoor patio lighting, great for landscape, swimming pool, garden, square, illuminating pathways, flower beds, trees, fences, driveways, stone walls, doorways, and etc.



CE	RoHS	UL	ETL	CCC	UL	UL	UL	UL	UL
Product Model No.									
Packaging Detail		126×17×14cm							
		STD PKG	4pcs						
		N.W	1.57kgs						
		G.W	2.57kgs						

5.5W LED 3000K 273lm / incl. Driver SEC: Constant Current: DC1000mA
DC24VDC / PRI: 90-265 V~ 50/60 Hz 0.5A



	1m	108.53lx	210.76cm
	2m	27.13lx	421.51cm
	3m	12.06lx	632.27cm
	4m	6.78lx	843.02cm
	5m	4.34lx	1053.78cm
	cd	Height	illuminance Diameter

Option colors



Various Brand of SMD LED Light Source:

OSRAM	PHILIPS	LUMENS	EPISTAR	CITIZEN	LUMINUS	DISON	SAMSUNG	BRIDGELUX	LG
-------	---------	--------	---------	---------	---------	-------	---------	-----------	----

OUTDOOR GARDEN
LAMP

TECHNICAL SPECIFICATIONS	
Input (Optional)	90-265V~50/60 Hz
Maximum Wattage	5.5W±10% Max


Number of LEDs
24 LEDs SMD

Luminous Flux
273LM (3000K)


Main Material
Aluminum

Color Temperature
3000K / 4000K / 6500K

CRI	≥80
Power Factor	≥0.5
Working Temperature	-10°C~45°C
Beam Angle (Optional)	110°
Fixture Dimmable	Non-dimmable
Electrical	External Driver
Protection class	IP65

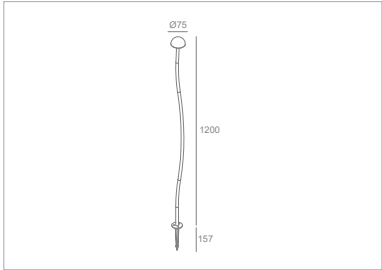

Especially designed for:
Outdoor patio lighting, great for landscape, swimming pool,garden, square, illuminating pathways, flower beds, trees, fences,driveways, stone walls, doorways, and etc.



CE	RoHS	UL	CCC	ETL	UL	UL	UL	UL	UL	UL
Product Model No.										
Packaging Detail		126×17×14cm								
		STD PKG	4pcs							
		N.W	1.57kgs							
		G.W	2.57kgs							

5.5W LED 3000K 273lm / incl. Driver SEC: Constant Current: DC1000mA
DC24VDC / PRI: 90-265 V~ 50/60 Hz 0.5A



	1m	108.53lx	210.76cm
	2m	27.13lx	421.51cm
	3m	12.06lx	632.27cm
	4m	6.78lx	843.02cm
	5m	4.34lx	1053.78cm
	cd	Height	illuminance
		Diameter	

Option colors



Various Brand of SMD LED Light Source:

OSRAM	PHILIPS	LUMENS	EPISTAR	CITIZEN	LUMINUS	DISON	SAMSUNG	BRIDGELUX	LG
-------	---------	--------	---------	---------	---------	-------	---------	-----------	----

Recommended hot selling combinations▼

combination①

