

OUTDOOR GARDEN
LAMP

TECHNICAL SPECIFICATIONS	
Input (Optional)	85-305V~50/60 Hz
Maximum Wattage	6W±10% Max


Number of LEDs	
1 LEDs COB	

Luminous Flux	
481LM (3000K)	

Main Material	
Aluminum	

Color Temperature	
3000K / 4000K / 6500K	

CRI	≥98
Power Factor	≥0.5
Working Temperature	-10°C~45°C
Beam Angle (Optional)	24°
Fixture Dimmable	Non-dimmable
Electrical	External Driver
Protection class	IP65

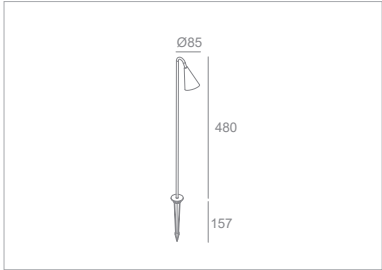


Especially designed for:
Outdoor patio lighting, great for landscape, swimming pool,garden, square, illuminating pathways, flower beds, trees, fences,driveways, stone walls, doorways, and etc.



CE	RoHS	UL	ETL	CCC	UL	UL	UL	UL	UL
Product Model No.									
Packaging Detail		123×29.5×15.5cm							
		STD PKG	5pcs						
		N.W	1.15kgs						
		G.W	2.15kgs						

6W LED 3000K 481lm / incl. Driver SEC: Constant Current: DC900mA
DC24-40VDC / PRI: 85-305 V~ 50/60 Hz 0.6A



	1m	1650.60lx	46.36cm
	2m	412.65lx	92.72cm
	3m	183.40lx	139.07cm
	4m	103.16lx	185.43cm
	5m	66.02lx	231.79cm
cd	Height	illuminance	Diameter

Option colors



Various Brand of COB LED Light Source:

OSRAM	PHILIPS	LUMENS	EPISTAR	CITIZEN	LUMINUS	DISON	SAMSUNG	BRIDGELUX	LG
-------	---------	--------	---------	---------	---------	-------	---------	-----------	----

OUTDOOR GARDEN
LAMP

TECHNICAL SPECIFICATIONS	
Input (Optional)	85-305V~50/60 Hz
Maximum Wattage	6W±10% Max


Number of LEDs
1 LEDs COB

Luminous Flux
481LM (3000K)

Main Material
Aluminum

Color Temperature
3000K / 4000K / 6500K

CRI	≥98
Power Factor	≥0.5
Working Temperature	-10°C~45°C
Beam Angle (Optional)	24°
Fixture Dimmable	Non-dimmable
Electrical	External Driver
Protection class	IP65

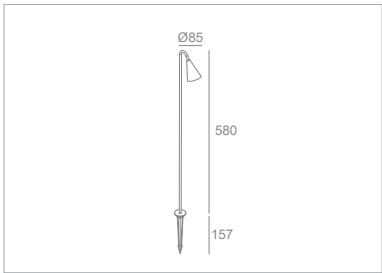


Especially designed for:
Outdoor patio lighting, great for landscape, swimming pool,garden, square, illuminating pathways, flower beds, trees, fences,driveways, stone walls, doorways, and etc.




Product Model No.		
Packaging Detail	123×29.5×15.5cm	
	STD PKG	5pcs
	N.W	1.15kgs
	G.W	2.15kgs

6W LED 3000K 481lm / incl. Driver SEC: Constant Current: DC900mA
DC24-40VDC / PRI: 85-305 V~ 50/60 Hz 0.6A



Warm White 3000K ∠24°

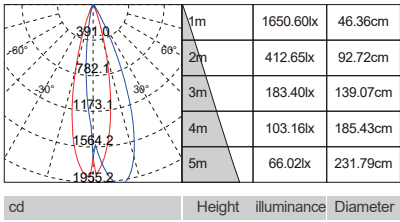

Option colors



Various Brand of COB LED Light Source:



OUTDOOR GARDEN
LAMP

TECHNICAL SPECIFICATIONS	
Input (Optional)	85-305V~50/60 Hz
Maximum Wattage	6W±10% Max


Number of LEDs
1 LEDs COB

Luminous Flux
481LM (3000K)

Main Material
Aluminum


Color Temperature
3000K / 4000K / 6500K

CRI	≥98
Power Factor	≥0.5
Working Temperature	-10°C~45°C
Beam Angle (Optional)	24°
Fixture Dimmable	Non-dimmable
Electrical	External Driver
Protection class	IP65

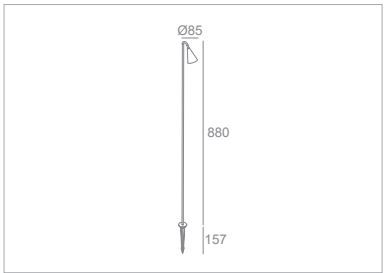


Especially designed for:

Outdoor patio lighting, great for landscape, swimming pool, garden, square, illuminating pathways, flower beds, trees, fences, driveways, stone walls, doorways, and etc.



CE	RoHS	REACH	UL	ETL	FCC	CCC	BSMI	CCC	CCC
Product Model No.									
Packaging Detail		123×29.5×15.5cm							
		STD PKG	5pcs						
		N.W	1.15kgs						
		G.W	2.15kgs						

6W LED 3000K 481lm / incl. Driver SEC: Constant Current: DC900mA
DC24-40VDC / PRI: 85-305 V~ 50/60 Hz 0.6A



Warm White 3000K ∠24°

	1m	1650.60lx	46.36cm
	2m	412.65lx	92.72cm
	3m	183.40lx	139.07cm
	4m	103.16lx	185.43cm
	5m	66.02lx	231.79cm
cd	Height	illuminance	Diameter

Option colors




Various Brand of COB LED Light Source:

OSRAM	PHILIPS	LUMENS	EPISTAR	CITIZEN	LUMINUS	DISON	SAMSUNG	BRIDGELUX	LG
-------	---------	--------	---------	---------	---------	-------	---------	-----------	----

OUTDOOR GARDEN
LAMP


TECHNICAL SPECIFICATIONS	
Input (Optional)	85-305V~50/60 Hz
Maximum Wattage	6W±10% Max
Number of LEDs	
1 LEDs COB	
Luminous Flux	
481LM (3000K)	
Main Material	
Aluminum	
Color Temperature	
3000K / 4000K / 6500K	

CRI	≥98
Power Factor	≥0.5
Working Temperature	-10°C~45°C
Beam Angle (Optional)	24°
Fixture Dimmable	Non-dimmable
Electrical	External Driver
Protection class	IP65

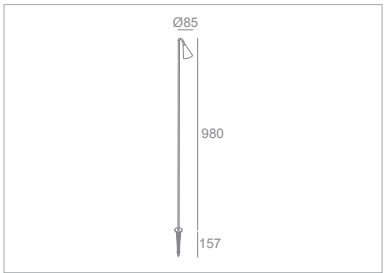


Especially designed for:

Outdoor patio lighting, great for landscape, swimming pool, garden, square, illuminating pathways, flower beds, trees, fences, driveways, stone walls, doorways, and etc.



CE	RoHS	UL	ETL	CCC	UL	UL	UL	UL	UL	UL
Product Model No.										
Packaging Detail		123×29.5×15.5cm								
		STD PKG	5pcs							
		N.W	1.15kgs							
		G.W	2.15kgs							

6W LED 3000K 481lm / incl. Driver SEC: Constant Current: DC900mA
DC24-40VDC / PRI: 85-305 V~ 50/60 Hz 0.6A



	1m	1650.60lx	46.36cm
	2m	412.65lx	92.72cm
	3m	183.40lx	139.07cm
	4m	103.16lx	185.43cm
	5m	66.02lx	231.79cm
cd	Height	illuminance	Diameter

Option colors



Various Brand of COB LED Light Source:

OSRAM	PHILIPS	LUMENS	EPISTAR	CITIZEN	LUMINUS	DISON	SAMSUNG	BRIDGELUX	LG
-------	---------	--------	---------	---------	---------	-------	---------	-----------	----

OUTDOOR GARDEN
LAMP

TECHNICAL SPECIFICATIONS	
Input (Optional)	85-305V~50/60 Hz
Maximum Wattage	6W±10% Max


Number of LEDs
1 LEDs COB

Luminous Flux
481LM (3000K)


Main Material
Aluminum

Color Temperature
3000K / 4000K / 6500K

CRI	≥98
Power Factor	≥0.5
Working Temperature	-10°C~45°C
Beam Angle (Optional)	24°
Fixture Dimmable	Non-dimmable
Electrical	External Driver
Protection class	IP65

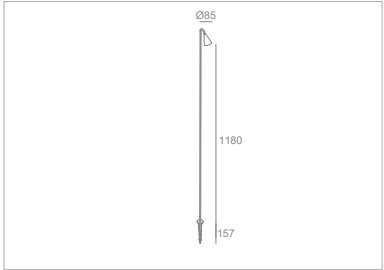


Especially designed for:
Outdoor patio lighting, great for landscape, swimming pool, garden, square, illuminating pathways, flower beds, trees, fences, driveways, stone walls, doorways, and etc.



CE	RoHS	REACH	UL	ETL	CCC	UL	UL	UL	UL	UL
Product Model No.										
Packaging Detail		123×29.5×15.5cm								
		STD PKG	5pcs							
		N.W	1.15kgs							
		G.W	2.15kgs							

6W LED 3000K 481lm / incl. Driver SEC: Constant Current: DC900mA
DC24-40VDC / PRI: 85-305 V~ 50/60 Hz 0.6A



	1m	1650.60lx	46.36cm
	2m	412.65lx	92.72cm
	3m	183.40lx	139.07cm
	4m	103.16lx	185.43cm
	5m	66.02lx	231.79cm
	6m	48.77lx	288.14cm
cd	Height	illuminance	Diameter

Option colors



Various Brand of COB LED Light Source:

OSRAM	PHILIPS	LUMENS	EPISTAR	CITIZEN	LUMINUS	DISON	SAMSUNG	BRIDGELUX	LG
-------	---------	--------	---------	---------	---------	-------	---------	-----------	----