


Light Source Test Report

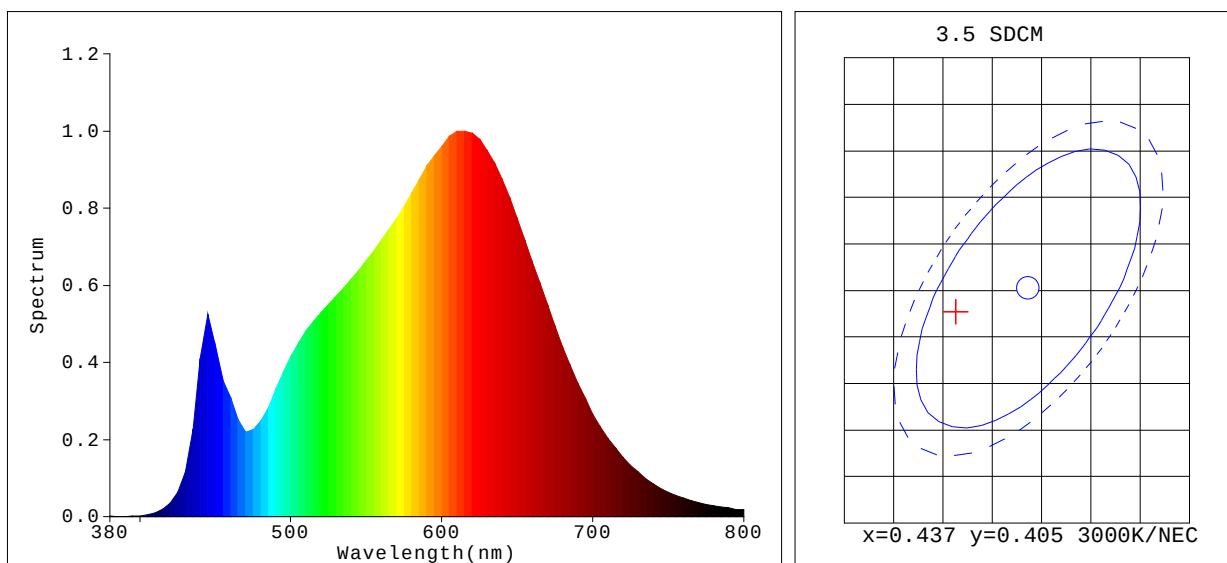

Color Parameters:

Chromaticity Coordinate: $x=0.4307$ $y=0.4029$ Chromaticity Coordinate: $u'=0.2471$ $v'=0.5200$ ($duv=4.14e-04$)

Tc=3098K Dominant WL:Ld=582.3nm Purity=50.2% Centroid WL:595.0nm

Ratio: R=24.9% G=72.5% B=2.6% Peak WL:Lp=615.0nm HWL:160.9nm

Render Index: Ra=90.6

R1 =90 R2 =94 R3 =98 R4 =91 R5 =90 R6 =94 R7 =90

R8 =77 R9 =46 R10=87 R11=92 R12=84 R13=91 R14=99 R15=85

Photo Parameters:

Flux: 1393.0 lm Fe: 4.6367 W Efficacy: 77.47 lm/W

Electrical Parameters:

Lamp : U=221.1V I=0.08554A P=17.98W PF=0.9505

Instrument Status:

Scan Range: 380.0nm-800.0nm Interval: 5.0nm[0]
REF=6473(R=2) %=-0.063%Ip=19618(G=4, D=54)
PMT: 27.1 centigrade [150.0]Product Type: 64A032-60 (烤漆银啡)
Number: 343
Temperature: 25.3 deg
Test Operator: Eric
Software: V2.00.128Manufacturer:
Test Department: LCZ
Humidity: 65.0%
Test Date: 2025-11-03 08:24:58
Instrument: PMS-80_V1 (SN: G107113CJ6321129)