
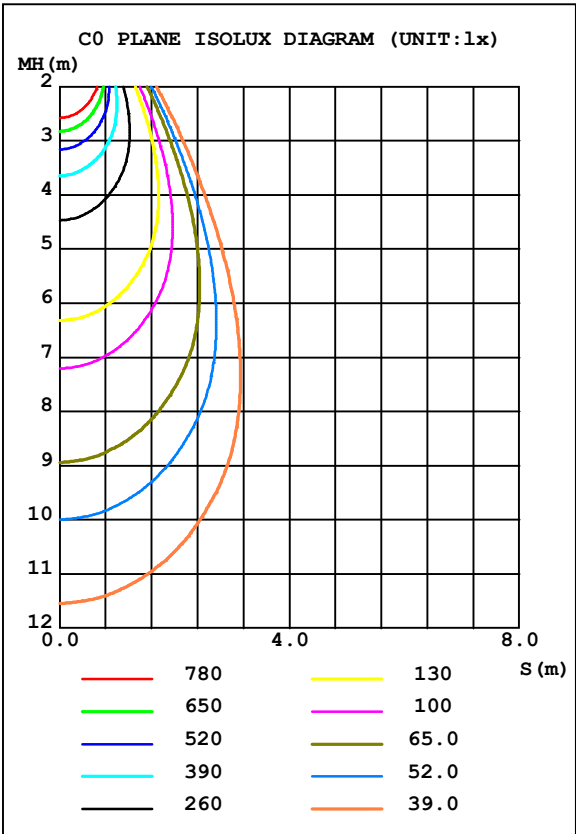


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.14V I:0.2701A P:56.332W PF:0.9473 Freq:49.99Hz Lamp Flux:6000x1 lm		
NAME: SLV600Y60HFGS322-A1	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: SAT	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 59.44 lm/W
MANSHINE	3535 Edison 2835	Imax(cd)	5215	S/MH(C0/180)	0.75	
NOMINAL POWER(W)	60	LOR(%)	55.8	S/MH(C90/270)	0.81	
RATED VOLTAGE(V)	220-240	TOTAL FLUX(lm)	3348.6	η UP,DN(C0-180)	0.0,24.5	
NOMINAL FLUX(lm)	6000	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,31.3	
LAMPS INSIDE	1	η up(%)	0.0	CIBSE SHR NOM	0.75	
TEST VOLTAGE(V)	220	η down(%)	55.8	CIBSE SHR MAX	0.75	

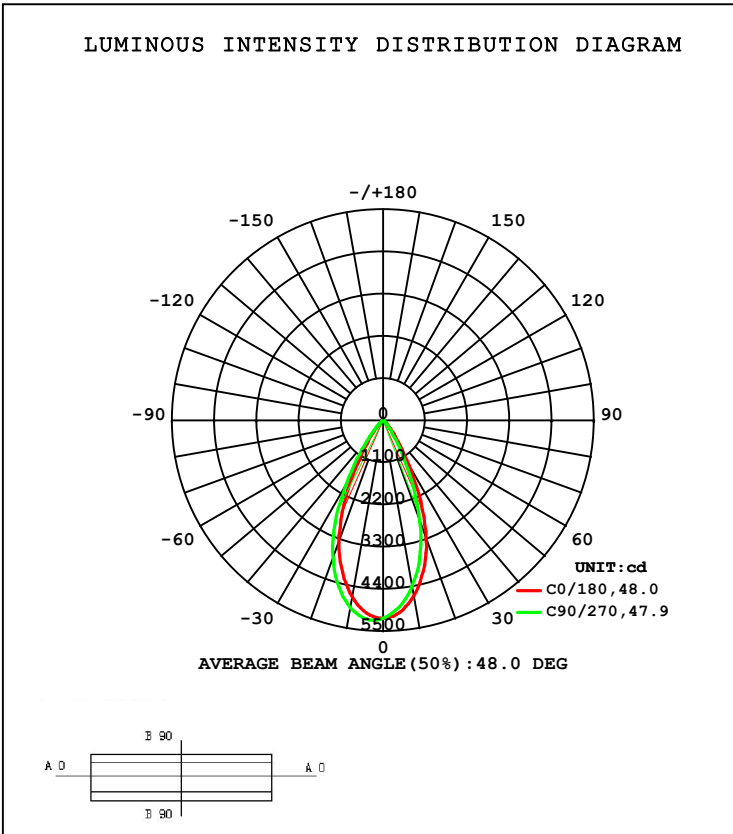

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:彭金英
Test Date:2024-12-9

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000 SYSTEM V2.0.404.6
Humidity:60%
Test Distance:12.350m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	4651	4468	4394	4452	4675	4857	4960	4873	0- 10	468.9	468.9	14,7.81
20	3304	2970	2825	2952	3388	3702	3846	3700	10- 20	1132	1601	47.8,26.7
30	1376	1093	975.5	1067	1455	1797	1959	1782	20- 30	1076	2677	79.9,44.6
40	349.8	274.4	243.4	270.6	384.9	482.6	546.1	471.7	30- 40	494.0	3171	94.7,52.8
50	67.05	46.46	38.73	45.28	74.70	104.1	117.6	99.91	40- 50	147.8	3319	99.1,55.3
60	4.412	3.191	2.896	3.085	5.117	9.411	11.87	8.592	50- 60	26.17	3345	99.9,55.7
70	1.350	0.9906	0.9980	0.9658	1.294	1.753	1.803	1.724	60- 70	2.686	3347	100,55.8
80	0.4720	0.3077	0.3440	0.2884	0.4164	0.6285	0.6084	0.6229	70- 80	0.8824	3348	100,55.8
90	0.1317	0.1212	0.1219	0.1222	0.1647	0.1983	0.1883	0.1778	80- 90	0.2904	3349	100,55.8
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:彭金英
Test Date:2024-12-9

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000 SYSTEM V2.0.404.6
Humidity:60%
Test Distance:12.350m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:220.14V I:0.2701A P:56.332W PF:0.9473 Freq:49.99Hz Lamp Flux:6000x1 lm		
NAME: SLV600Y60HFGS322-A1	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: SAT	SUR.:	Shielding Angle:

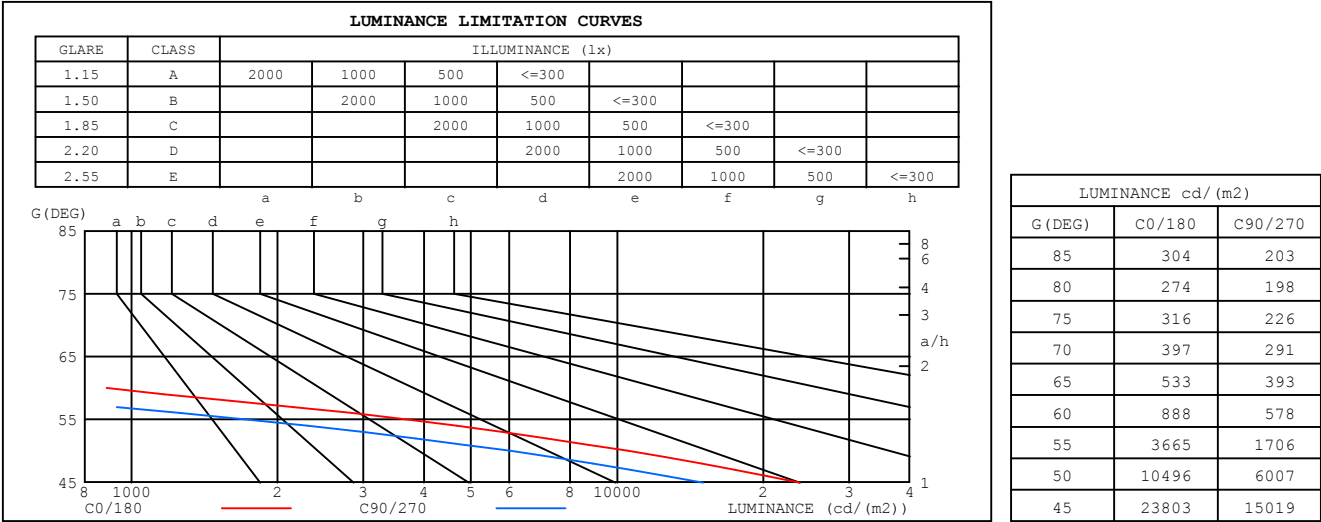


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:彭金英
Test Date:2024-12-9

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000 SYSTEM V2.0.404.6
Humidity:60%
Test Distance:12.350m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.14V I:0.2701A P:56.332W PF:0.9473 Freq:49.99Hz Lamp Flux:6000x1 lm		
NAME: SLV600Y60HFGS322-A1	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: SAT	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	.66	.66	.66	.65	.65	.65	.62	.62	.62	.59	.59	.59	.57	.57	.57	.56
1.0	.62	.61	.60	.61	.60	.59	.59	.58	.57	.57	.56	.55	.55	.54	.54	.53
2.0	.58	.56	.54	.57	.55	.54	.55	.54	.53	.54	.53	.51	.52	.51	.50	.49
3.0	.55	.52	.50	.54	.51	.50	.52	.50	.49	.51	.49	.48	.50	.48	.47	.46
4.0	.51	.49	.46	.51	.48	.46	.50	.47	.46	.49	.47	.45	.47	.46	.45	.44
5.0	.48	.45	.43	.48	.45	.43	.47	.45	.43	.46	.44	.42	.45	.43	.42	.41
6.0	.46	.43	.41	.45	.42	.40	.45	.42	.40	.44	.42	.40	.43	.41	.40	.39
7.0	.43	.40	.38	.43	.40	.38	.42	.40	.38	.42	.39	.38	.41	.39	.37	.37
8.0	.41	.38	.36	.41	.38	.36	.40	.38	.36	.40	.37	.36	.39	.37	.35	.35
9.0	.39	.36	.34	.39	.36	.34	.38	.36	.34	.38	.35	.34	.37	.35	.34	.33
10.0	.37	.34	.32	.37	.34	.32	.37	.34	.32	.36	.34	.32	.36	.34	.32	.31

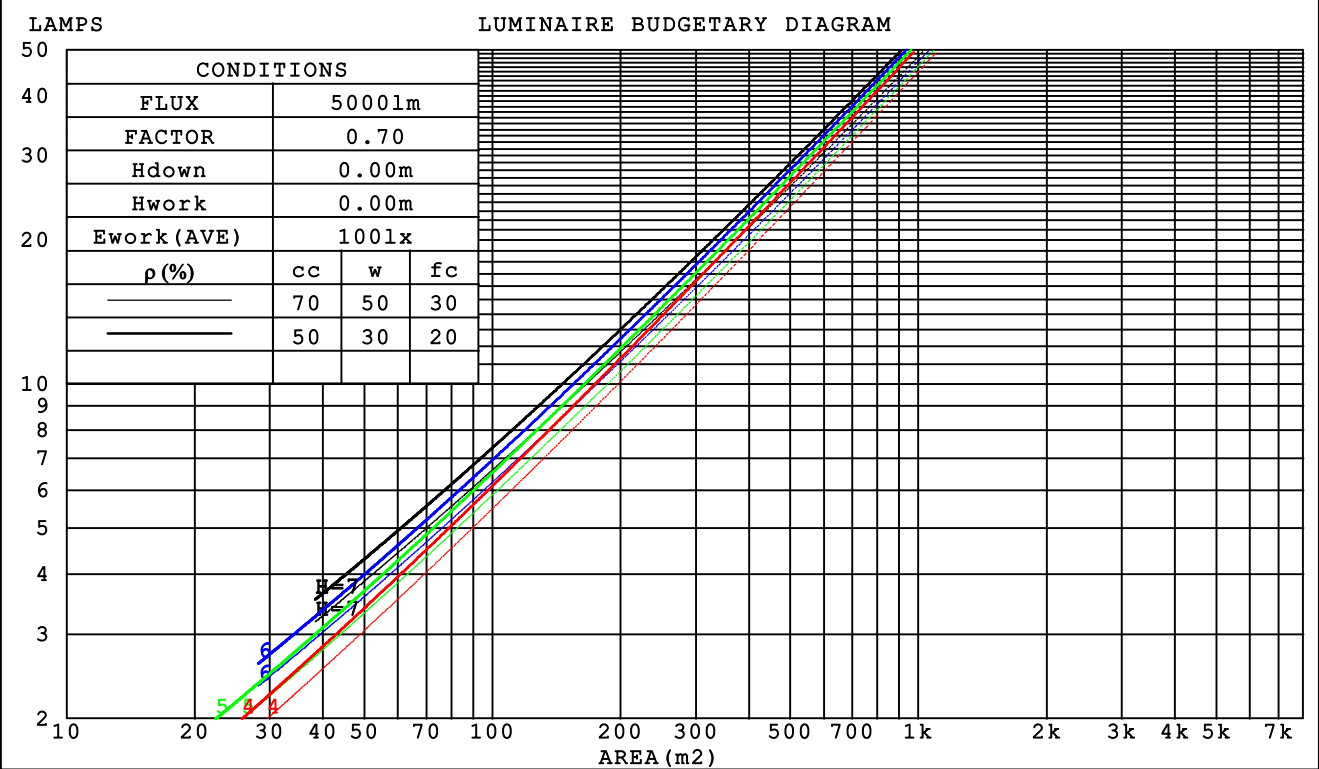

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:彭金英
Test Date:2024-12-9

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000 SYSTEM V2.0.404.6
Humidity:60%
Test Distance:12.350m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:220.14V I:0.2701A P:56.332W PF:0.9473 Freq:49.99Hz Lamp Flux:6000x1 lm					
NAME: SLV600Y60HFGS322-A1			TYPE:		WEIGHT:
SPEC.:			DIM.:		SERIAL No.:
MFR.: SAT			SUR.:		Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0														
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0														
ρ_{fc}	20%			20%			20%			20%			20%			0														
RCR	RCR:Room Cavity Ratio															Wall Exitance Coefficients (WEC)														
0.0																														
1.0	.093	.053	.017	.090	.051	.016	.083	.047	.015	.076	.044	.014	.070	.041	.013															
2.0	.089	.049	.015	.086	.047	.015	.080	.044	.014	.074	.042	.013	.069	.039	.012															
3.0	.084	.045	.013	.082	.044	.013	.077	.042	.013	.072	.040	.012	.068	.038	.012															
4.0	.080	.042	.012	.078	.041	.012	.074	.039	.012	.070	.038	.011	.066	.036	.011															
5.0	.077	.039	.011	.075	.038	.011	.071	.037	.011	.067	.036	.011	.064	.034	.010															
6.0	.073	.037	.010	.071	.036	.010	.068	.035	.010	.065	.034	.010	.062	.033	.010															
7.0	.070	.035	.010	.068	.034	.010	.066	.033	.010	.063	.032	.009	.060	.031	.009															
8.0	.067	.033	.009	.066	.032	.009	.063	.032	.009	.061	.031	.009	.058	.030	.009															
9.0	.064	.031	.009	.063	.031	.009	.061	.030	.009	.059	.029	.008	.057	.029	.008															
10.0	.062	.030	.008	.061	.029	.008	.059	.029	.008	.057	.028	.008	.055	.028	.008															

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Ceiling Cavity Exitance Coefficients(CCEC)															
0.0	.106	.106	.106	.091	.091	.091	.062	.062	.062	.036	.036	.036	.011	.011	.011	
1.0	.095	.088	.081	.081	.075	.070	.056	.052	.048	.032	.030	.028	.010	.010	.009	
2.0	.086	.074	.064	.074	.064	.055	.051	.044	.038	.029	.026	.022	.009	.008	.007	
3.0	.079	.063	.051	.068	.055	.044	.047	.038	.031	.027	.022	.018	.009	.007	.006	
4.0	.073	.055	.041	.063	.048	.036	.043	.033	.025	.025	.019	.015	.008	.006	.005	
5.0	.068	.048	.034	.058	.042	.030	.040	.029	.021	.023	.017	.012	.008	.006	.004	
6.0	.064	.043	.028	.055	.037	.025	.038	.026	.018	.022	.015	.010	.007	.005	.003	
7.0	.060	.039	.024	.052	.034	.021	.036	.024	.015	.021	.014	.009	.007	.005	.003	
8.0	.057	.035	.021	.049	.031	.018	.034	.022	.013	.020	.013	.008	.006	.004	.003	
9.0	.054	.032	.018	.047	.028	.016	.032	.020	.011	.019	.012	.007	.006	.004	.002	
10.0	.051	.030	.016	.044	.026	.014	.031	.018	.010	.018	.011	.006	.006	.004	.002	

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:彭金英
 Test Date:2024-12-9

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000 SYSTEM V2.0.404.6
 Humidity:60%
 Test Distance:12.350m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:220.14V I:0.2701A P:56.332W PF:0.9473 Freq:49.99Hz Lamp Flux:6000x1 lm										
NAME: SLV600Y60HFGS322-A1					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: SAT					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	11.1	12.0	11.3	12.1	12.3	9.4	10.3	9.6	10.4	10.6
3H	10.9	11.7	11.2	11.9	12.1	9.2	10.0	9.5	10.2	10.4
4H	10.8	11.6	11.1	11.8	12.0	9.2	9.9	9.4	10.1	10.4
6H	10.7	11.4	11.0	11.7	11.9	9.1	9.8	9.4	10.0	10.3
8H	10.7	11.4	11.0	11.6	11.9	9.0	9.7	9.3	10.0	10.2
12H	10.6	11.3	11.0	11.6	11.8	9.0	9.6	9.3	9.9	10.2
4H 2H	10.8	11.6	11.1	11.8	12.0	9.2	9.9	9.4	10.1	10.4
3H	10.6	11.3	11.0	11.6	11.8	9.0	9.6	9.3	9.9	10.2
4H	10.6	11.1	10.9	11.4	11.8	8.9	9.5	9.2	9.8	10.1
6H	10.5	11.0	10.8	11.3	11.7	8.8	9.3	9.2	9.6	10.0
8H	10.4	10.9	10.8	11.2	11.6	8.7	9.2	9.1	9.6	9.9
12H	10.4	10.8	10.8	11.2	11.6	8.7	9.1	9.1	9.5	9.9
8H 4H	10.4	10.9	10.8	11.2	11.6	8.7	9.2	9.1	9.6	9.9
6H	10.3	10.7	10.7	11.1	11.5	8.6	9.0	9.1	9.4	9.8
8H	10.2	10.6	10.7	11.0	11.5	8.6	8.9	9.0	9.3	9.8
12H	10.2	10.5	10.7	10.9	11.4	8.5	8.8	9.0	9.3	9.7
12H 4H	10.4	10.8	10.8	11.2	11.6	8.7	9.1	9.1	9.5	9.9
6H	10.2	10.6	10.7	11.0	11.5	8.6	8.9	9.0	9.3	9.8
8H	10.2	10.5	10.7	10.9	11.4	8.5	8.8	9.0	9.3	9.7
Variations with the observer position at spacings:										
S = 1.0H	+ 3.8 / -16.7					+ 2.9 / -18.1				
1.5H	+ 5.8 / -13.2					+ 5.0 / -13.3				
2.0H	+ 7.6 / -15.5					+ 6.9 / -13.9				

CIE Pub.117, 6000 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 6.2)

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:彭金英
 Test Date:2024-12-9

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000 SYSTEM V2.0.404.6
 Humidity:60%
 Test Distance:12.350m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:220.14V I:0.2701A P:56.332W PF:0.9473 Freq:49.99Hz Lamp Flux:6000x1 lm		
NAME: SLV600Y60HFGS322-A1	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: SAT	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	49	46	44	49	46	44	49	45	44	42
0.80	53	50	48	53	50	48	52	50	48	46
1.00	56	53	51	55	53	51	54	52	50	48
1.25	58	55	53	57	55	53	56	54	53	50
1.50	59	57	55	59	56	55	58	56	54	52
2.00	61	59	57	60	58	56	59	57	56	53
2.50	62	60	58	61	59	58	59	58	57	53
3.00	63	61	59	62	60	59	60	58	57	54
4.00	64	62	61	63	61	60	61	60	59	55
5.00	64	63	62	63	62	61	61	60	59	55
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: 彭金英
 Test Date: 2024-12-9

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000 SYSTEM V2.0.404.6
 Humidity: 60%
 Test Distance: 12.350m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:220.14V I:0.2701A P:56.332W PF:0.9473 Freq:49.99Hz Lamp Flux:6000x1 lm		
NAME: SLV600Y60HFGS322-A1	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: SAT	SUR.:	Shielding Angle:

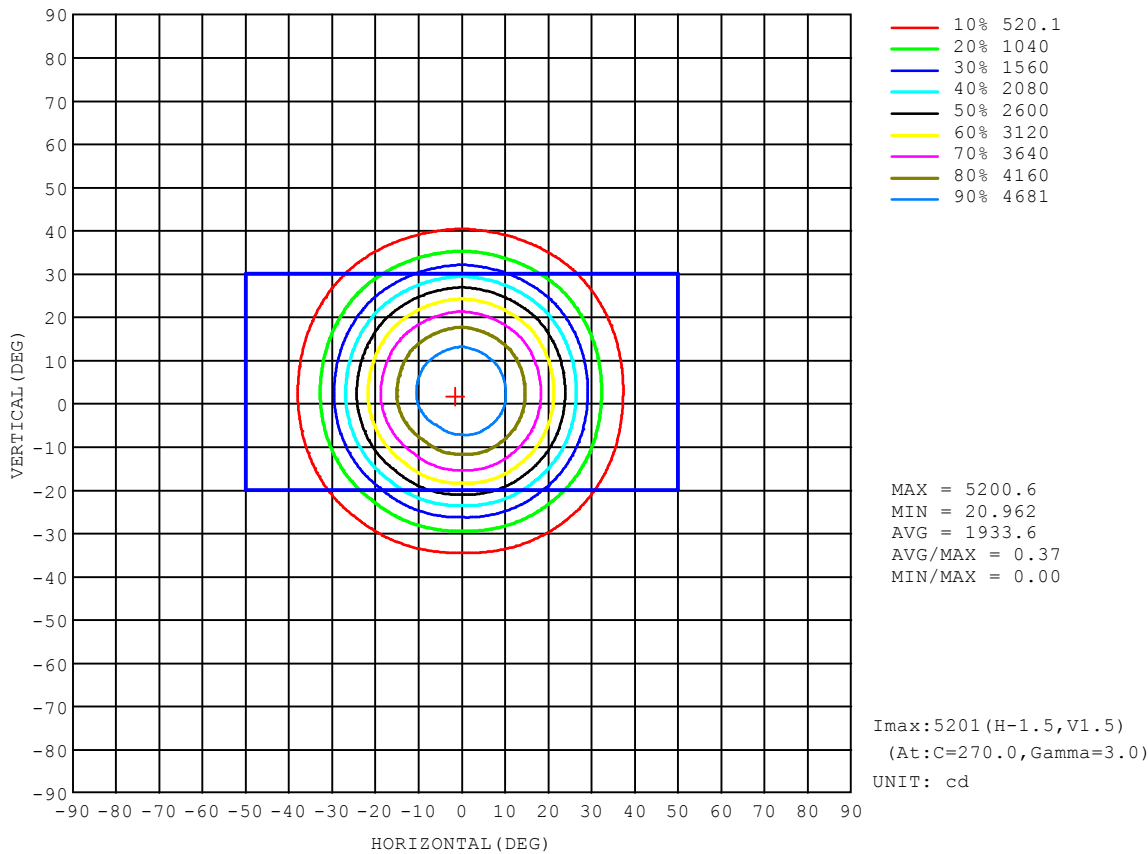


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:彭金英
Test Date:2024-12-9

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000 SYSTEM V2.0.404.6
Humidity:60%
Test Distance:12.350m [K=1.0000]
Remarks:

AAI Figure

Test:U:220.14V I:0.2701A P:56.332W PF:0.9473 Freq:49.99Hz Lamp Flux:6000x1 lm		
NAME: SLV600Y60HFGS322-A1	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: SAT	SUR.:	Shielding Angle:

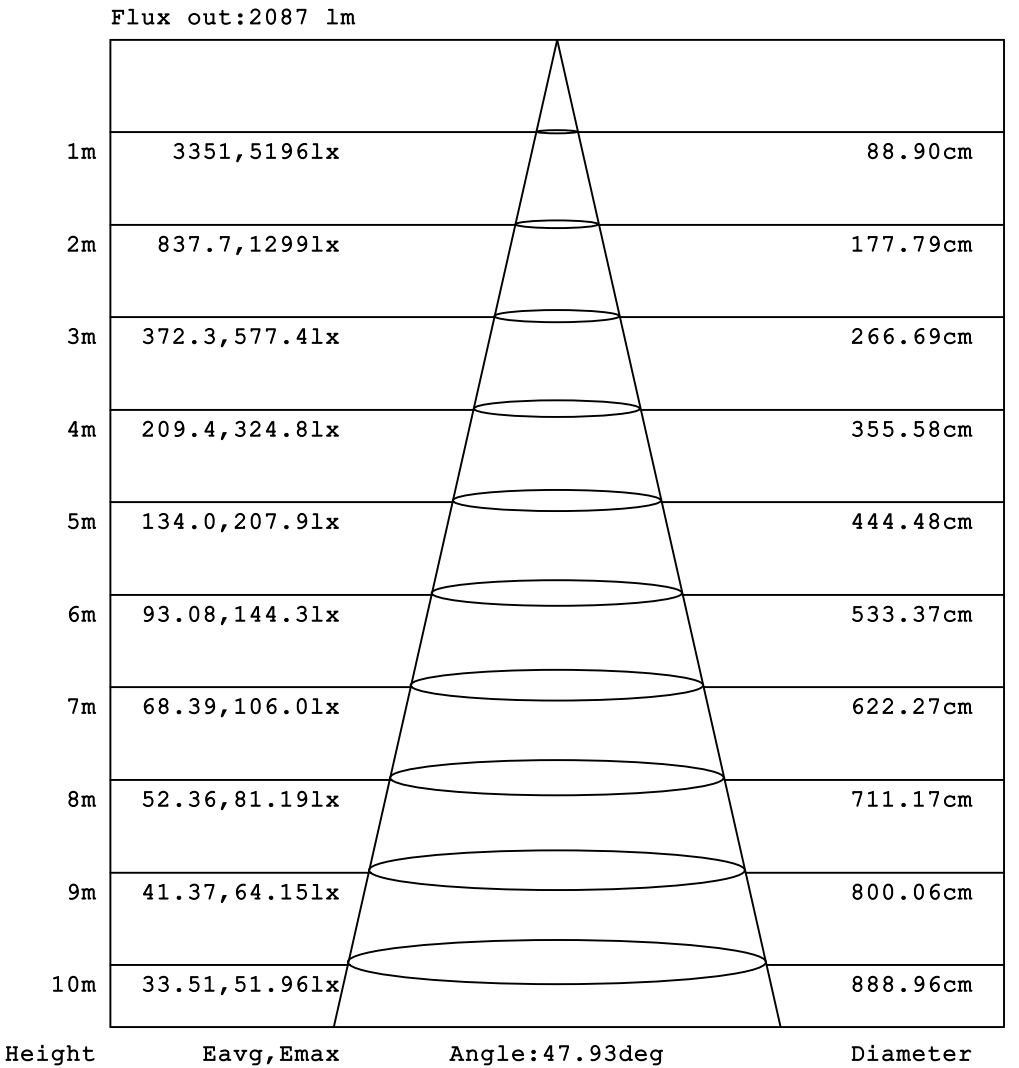


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:彭金英
Test Date:2024-12-9

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000 SYSTEM V2.0.404.6
Humidity:60%
Test Distance:12.350m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:220.14V I:0.2701A P:56.332W PF:0.9473 Freq:49.99Hz Lamp Flux:6000x1 lm		
NAME: SLV600Y60HFGS322-A1	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: SAT	SUR.:	Shielding Angle:

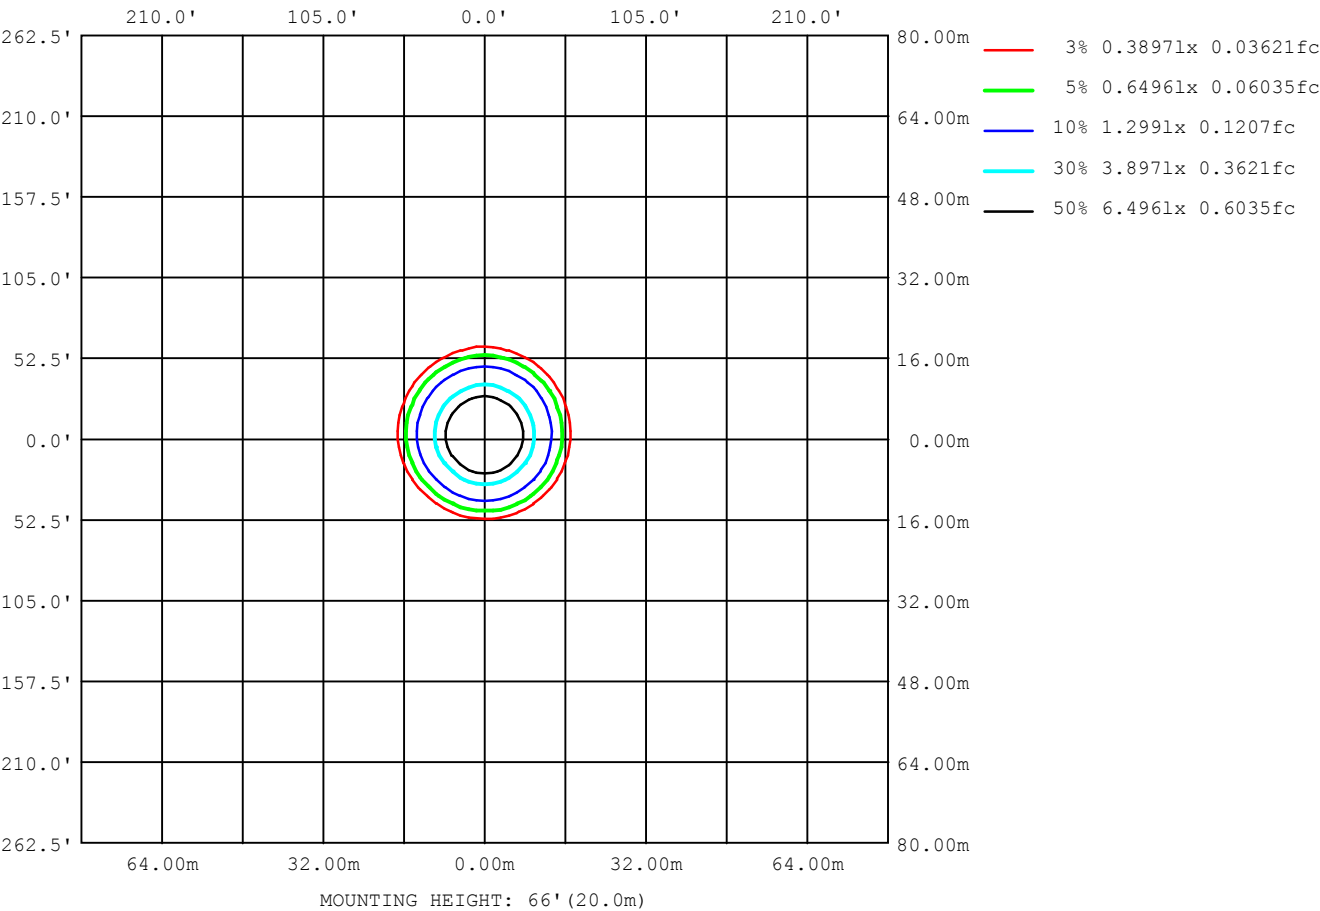

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:彭金英
Test Date:2024-12-9

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000 SYSTEM V2.0.404.6
Humidity:60%
Test Distance:12.350m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:220.14V I:0.2701A P:56.332W PF:0.9473 Freq:49.99Hz Lamp Flux:6000x1 lm		
NAME: SLV600Y60HFGS322-A1	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: SAT	SUR.:	Shielding Angle:


AvgL	cd/m2
L 0~180 (65) av	532
L 0~180 (75) av	303
L 0~180 (85) av	277
L 90~270 (65) av	587
L 90~270 (75) av	317
L 90~270 (85) av	292
L 45 (65) av	550
L 45 (75) av	305
L 45 (85) av	286

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:彭金英
Test Date:2024-12-9

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000 SYSTEM V2.0.404.6
Humidity:60%
Test Distance:12.350m [K=1.0000]
Remarks:

Planar Illuminance Curve

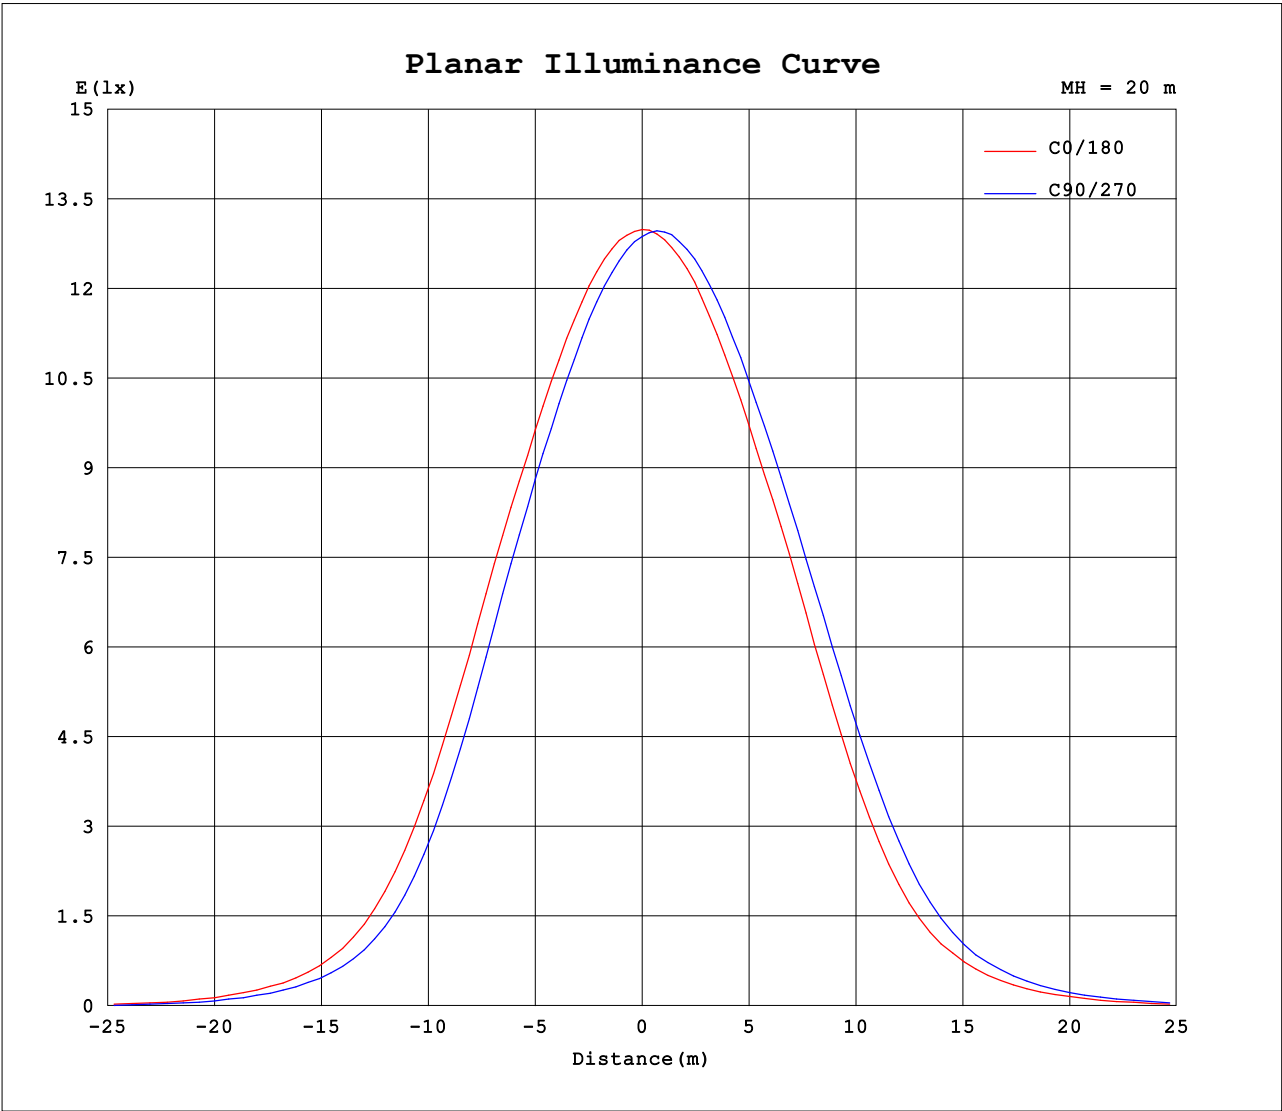

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:彭金英
Test Date:2024-12-9

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000 SYSTEM V2.0.404.6
Humidity:60%
Test Distance:12.350m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.14V I:0.2701A P:56.332W PF:0.9473 Freq:49.99Hz Lamp Flux:6000x1 lm		
NAME: SLV600Y60HFGS322-A1	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: SAT	SUR.:	Shielding Angle:

Table--1

UNIT: cd

[illegible]

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: 彭金英
Test Date: 2024-12-9

```

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000 SYSTEM V2.0.404.6
Humidity:60%
Test Distance:12.350m [K=1.0000]
Remarks:

```