


Light Source Test Report

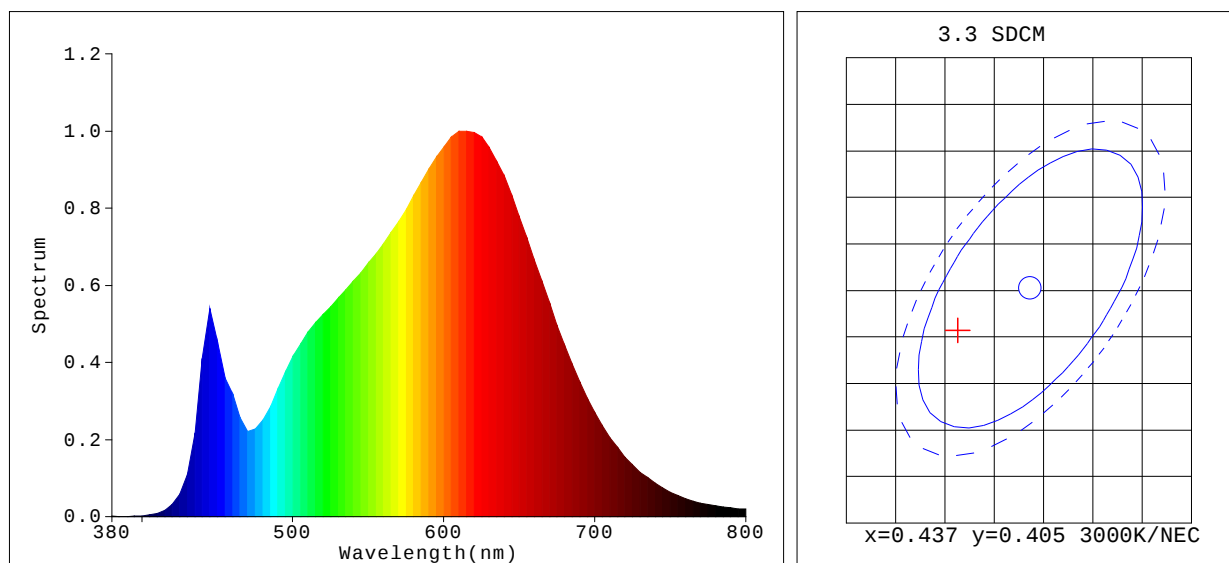

Color Parameters:

Chromaticity Coordinate: $x=0.4307$ $y=0.4013$ Chromaticity Coordinate: $u'=0.2477$ $v'=0.5194$ ($duv=-2.36e-04$)

Tc=3084K Dominant WL:Ld=582.5nm Purity=49.7% Centroid WL:595.0nm

Ratio: R=25.1% G=72.2% B=2.6% Peak WL:Lp=615.0nm HWL:160.4nm

Render Index: Ra=91.1

R1 =91 R2 =95 R3 =98 R4 =91 R5 =91 R6 =94 R7 =91

R8 =78 R9 =49 R10=88 R11=93 R12=85 R13=92 R14=99 R15=86

Photo Parameters:

Flux: 1550.7 lm Fe: 5.1923 W Efficacy: 73.95 lm/W

Electrical Parameters:

Lamp : U=221.3V I=0.09908A P=20.97W PF=0.9563

Instrument Status:

Scan Range: 380.0nm-800.0nm Interval: 5.0nm[0]
REF=7196(R=2) %=-0.056%Ip=21832(G=4,D=54)
PMT: 28.2 centigrade [150.0]Product Type: 64A049 (砂黑)
Number: 287
Temperature: 25.3 deg
Test Operator: Eric
Software: V2.00.128Manufacturer:
Test Department: LCZ
Humidity: 65.0%
Test Date: 2025-09-26 17:04:57
Instrument: PMS-80_V1 (SN: G107113CJ6321129)